


Open Front Booths

- **Heavy Duty Bolted Construction**
- **Batch and Automated Production Designs**
- **Easy to Install**
- **ETL Certification Available**
- **Available in a Wide Range of Designs to Meet Any Production Requirement**

Designed for both batch and conveyORIZED production systems, Col-Met's Open Front Spray Booths offer a safe and clean environment for any type of finishing operation. Air flow is drawn in through the open front, across the work area and exhausted through a filter bank in the back of the booth. The dry arrestor filters trap the airborne overspray particles before the filtered air is discharged through the exhaust system and into the atmosphere.

Conveyor pass-through openings can be as much as 25% of the booth open front area, without requiring additional exhaust fan capacity. Specially engineered enclosures may be designed to meet your requirements.

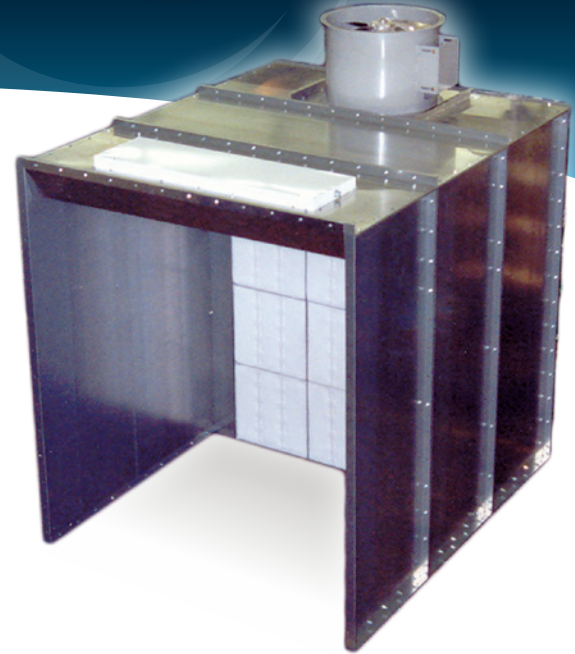

Booth Features

- >> **Heavy Duty Construction** Booths are constructed from 18-gauge, prime quality galvanized steel and are engineered with corresponding support structure as booth dimensions demand. All panels and support members are precision punched for easy nut and bolt assembly.
- >> **Exhaust Chamber** A tubeaxial exhaust fan designed specifically for use in paint spray booths powers the airflow through the booth and exhaust stack. All exhaust fans are of non-sparking construction, and motor drive and bearings are sealed from the air stream of the exhaust. Motors are provided with each unit.
- >> **Superior Lighting** Lighted booths get bright, full booth illumination from four-tube, 48" long, 32-watt, fluorescent light fixtures. Col-Met light fixtures are ETL listed (Class 1 Division 2) and are supplied with dual ballasts to accept either 120V or 277V power. Bulbs are included.
- >> **Efficient Fans & Motors** Quality brand-name tubeaxial fans and motors
- >> **Air Solenoid Valve** Interlocked to the exhaust fan and air supply for the spray application equipment
- >> **Meets Quality Performance Standards** Spray booths manufactured by Col-Met meet and/or exceed all applicable OSHA and NFPA regulations.

Booth Options

- >> Air replacement units and intake chambers can be added
- >> Reduced air flows for automatic spray operations
- >> Durable powder coated white option available
- >> Conveyor and crane slots/openings available
- >> Control panel and other electrical components can be purchased separately



UL & ETL listed control panel



Air solenoid valve



5/16" bolts with serrated lock nut



Industry-leading light levels

Open Front Booths



Selecting a Booth Size

Col-Met can design and build spray booths in a variety of sizes and configurations. Although our team can engineer a custom booth to fit your needs, below are standard sizes that are quickly available to you.

Model Number	Interior Dimensions			Exterior Dimensions			Qty. Lights	Qty. Filters	Fan Diameter	Fan HP	SCFM @ 1/2" SP	Shipping Weight
	Width	Height	Length	Width	Height	Length						
IB-04-07-05	4'-0"	7'-0"	5'-0"	4'-4"	7'-2"	7'-2"	0	8	18"	.75HP	3,500	675
IB-06-07-05	6'-0"	7'-0"	5'-0"	6'-4"	7'-2"	7'-8"	1	12	24"	1HP	5,250	940
IB-08-07-05	8'-0"	7'-0"	5'-0"	8'-4"	7'-2"	7'-8"	1	16	24"	2HP	7,150	1,240
IB-10-07-05	10'-0"	7'-0"	5'-0"	10'-4"	7'-2"	8'-2"	2	20	30"	2HP	8,750	1,630
IB-12-07-07	12'-0"	7'-0"	7'-0"	12'-4"	7'-2"	10'-2"	2	24	30"	3HP	10,500	1,870
IB-14-07-07	14'-0"	7'-0"	7'-0"	15'-0"	7'-6"	10'-8"	2	32	30"	3HP	12,250	2,450
IB-16-07-07	16'-0"	7'-0"	7'-0"	17'-0"	7'-6"	10'-8"	2	36	30"	5HP	14,000	2,650
IB-18-07-07	18'-0"	7'-0"	7'-0"	19'-0"	7'-6"	11'-8"	3	40	36"	5HP	15,750	3,000
IB-20-07-07	20'-0"	7'-0"	7'-0"	19'-0"	7'-6"	11'-8"	3	40	36"	5HP	15,750	3,000
IB-04-08-05	4'-0"	8'-0"	5'-0"	4'-4"	8'-2"	7'-2"	0	8	18"	.75HP	4,000	703
IB-06-08-05	6'-0"	8'-0"	5'-0"	6'-4"	8'-2"	7'-8"	1	12	24"	1.5HP	6,000	1,020
IB-08-08-05	8'-0"	8'-0"	5'-0"	8'-4"	8'-2"	7'-8"	1	16	24"	2HP	8,000	1,490
IB-10-08-05	10'-0"	8'-0"	5'-0"	10'-4"	8'-2"	8'-2"	2	20	30"	3HP	10,000	1,780
IB-12-08-07	12'-0"	8'-0"	7'-0"	12'-4"	8'-2"	10'-2"	2	24	30"	3HP	12,000	2,270
IB-14-08-07	14'-0"	8'-0"	7'-0"	15'-0"	8'-6"	10'-8"	2	32	30"	5HP	14,000	2,600
IB-16-08-07	16'-0"	8'-0"	7'-0"	17'-0"	8'-6"	11'-8"	2	36	36"	5HP	16,000	2,810
IB-18-08-07	18'-0"	8'-0"	7'-0"	19'-0"	8'-6"	11'-8"	3	40	36"	5HP	18,000	3,150
IB-20-08-07	20'-0"	8'-0"	7'-0"	21'-0"	8'-6"	11'-8"	4	44	42"	5HP	20,000	3,690
IB-04-10-05	4'-0"	10'-0"	5'-0"	4'-4"	10'-2"	7'-2"	0	10	18"	1.5HP	5,000	1,100
IB-06-10-05	6'-0"	10'-0"	5'-0"	6'-4"	10'-2"	7'-8"	1	15	24"	2HP	7,500	1,650
IB-08-10-05	8'-0"	10'-0"	5'-0"	8'-4"	10'-2"	8'-2"	1	20	30"	2HP	10,000	1,900
IB-10-10-05	10'-0"	10'-0"	5'-0"	10'-4"	10'-2"	8'-2"	2	25	30"	3HP	12,500	2,350
IB-12-10-07	12'-0"	10'-0"	7'-0"	12'-4"	10'-2"	10'-2"	2	30	30"	5HP	15,000	2,500
IB-14-10-07	4'-0"	10'-0"	7'-0"	15'-0"	10'-6"	11'-8"	2	40	36"	5HP	17,500	3,000
IB-16-10-07	16'-0"	10'-0"	7'-0"	17'-0"	10'-6"	11'-8"	2	45	42"	5HP	20,000	3,400
IB-18-10-07	18'-0"	10'-0"	7'-0"	19'-0"	10'-6"	11'-8"	3	50	42"	5HP	22,500	4,000
IB-20-10-07	20'-0"	10'-0"	7'-0"	21'-0"	10'-6"	11'-8"	4	55	42"	7.5HP	25,000	4,400
IB-04-12-05	4'-0"	12'-0"	5'-0"	4'-4"	12'-2"	7'-8"	0	12	24"	1.5HP	6,000	975
IB-06-12-05	6'-0"	12'-0"	5'-0"	6'-4"	12'-2"	7'-8"	1	18	24"	3HP	9,000	1,500
IB-08-10-05	8'-0"	10'-0"	5'-0"	8'-4"	10'-2"	8'-2"	1	24	30"	3HP	12,000	1,700
IB-10-12-05	10'-0"	12'-0"	5'-0"	10'-4"	12'-2"	8'-2"	2	30	30"	5HP	15,000	2,200
IB-12-12-07	12'-0"	12'-0"	7'-0"	12'-4"	12'-2"	11'-2"	2	36	36"	5HP	18,000	2,500
IB-14-12-07	14'-0"	12'-0"	7'-0"	15'-0"	12'-6"	11'-8"	2	48	42"	5HP	21,000	3,200
IB-16-12-07	16'-0"	12'-0"	7'-0"	17'-0"	12'-6"	11'-8"	2	54	42"	7.5HP	24,000	3,500
IB-18-12-07	18'-0"	12'-0"	7'-0"	19'-0"	12'-6"	11'-8"	3	60	42"	7.5HP	27,000	4,100
IB-20-12-07	20'-0"	12'-0"	7'-0"	21'-0"	12'-6"	11'-8"	4	66	42"	10HP	30,000	4,700
Ref. Key	A	B	C		D							

