




18 902 Tamper

Tampers are available in single-phase, three-phase, and DC-version.

PORTABLE & LIGHT-WEIGHT

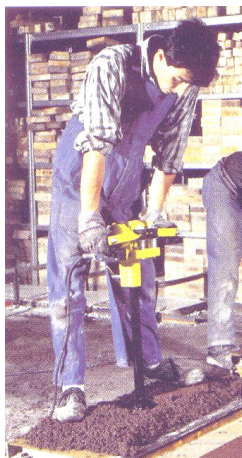

Part number	Centrifugal force	Frequency	Synchronous speed	Power	Voltage	Current	Phase	Weight
	[lbf]	[Hz]	[rpm]	[hp]	[V]	[A]		[lbs]
18 902 201	315 lbf	50	3000	0.20	220-260 380-440	0.47/0.27	3	25
18 902 213	315 lbf	60	3600	0.20	220-265 380-460	0.47/0.27	3	25
18 902 413	315 lbf	60	3800	0.27	110-120	1.8	1	25
18 902 506	315 lbf	0	3680	0.20	12V DC	12.6	1	25
18 902 507	315 lbf	0	3680	0.20	24V DC	6.3	1	25

Dimensions without accessories: Height 9.4" x Width 17.0" x Depth 7.2"

Supplied without accessories.

All models include 12.8 ft power cable without plug; except 18 902 413 with plug.