



CLEMCO
The Performance System

TECHNICAL DATA SHEET

Note: For safe, efficient blasting, read and follow the owner's manual and seek training for everyone who will use this equipment.

Purpose

4-ply blast hose is used in industrial settings where external scuffing and occasional light vehicle traffic is expected. It can be used with all common blast media.

Description of Operation

Clemco 4-ply blast hose accepts properly sized blast couplings and nozzle holders. The coupled hose can attach to any blast machine fitted with quick coupling connections.

4-ply hose is widely used in shipyards and railyards because it stands up to external abrasions from being dragged about the blast site. The tough outer casing of 4-ply blast hose can even withstand occasional light vehicle traffic without collapsing.

For applications where 4-ply blast hoses are used, a 10- to 15-foot length of Clemco Supa hose can be connected as the last section before the nozzle. This whip hose is lighter in weight and easier for the operator to bend and maneuver.

Advantages

- 4-ply hose has a durable outer casing compared to 2-braid and Supa hose
- Inner tube wall of 1/4-inch thick SBR rubber treated with static-dissipating compound
- Four-layer outer casing of cloth and rubber-impregnated fiber winding
- Casing is pin-pricked to prevent formation of air pockets between layers


Description

Durable, reinforced 4-ply blast hose, rated at 175 psi working pressure.



Blast Hose, 4-Ply

Stock No. 23444, 23445, 23446, 23447, 23448, 23449, 23450, 23451, 23452, 23453, 23455, 24750

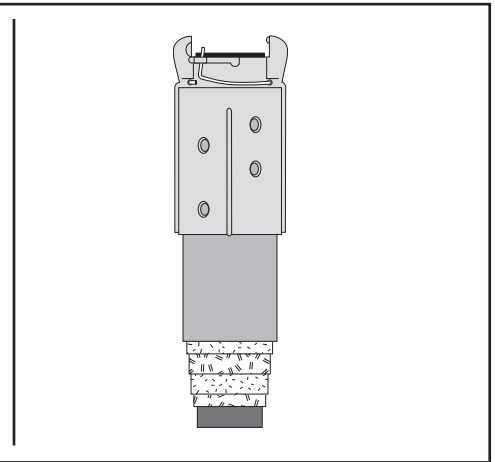

Options and Accessories

Description	Stock No.
For Clemco 1/2-inch ID 4-ply	
CHE-1/2 aluminum nozzle holder, 3/4" thread	00577
CQA-1/2 aluminum coupling	00599
For Clemco 3/4-inch ID 4-ply	
NHP-1 nylon nozzle holder, contractor thread	04106
HEP-1 nylon nozzle holder, 1-1/4" thread	07720
CQP-1 nylon coupling	08412
For Clemco 1-inch ID 4-ply	
NHP-2 nylon nozzle holder, contractor thread.....	04127
CQP-2 nylon coupling	21711
For Clemco 1-1/4-inch ID 4-ply	
NHP-3 nylon nozzle holder, contractor thread	04128
CQP-3 nylon coupling	08414
For 1-1/2-inch 4-ply	
CFP cplg nozzle holder	07716
FHP cplg nozzle holder	07718
CFPM cplg nozzle holder	07719
CQP-4 nylon coupling	07714
Related Clemco Literature	
Contractor Series Catalog	21385
Abrasive Blasting Safety Practices	22090
Blast Off 2	09294
Safety Cable TDS	21970

Uncoupled, 4-ply Blast Hose

Description	Stock No.
1/2" ID x 25 ft.	23444
1/2" ID x 50 ft.	23445
3/4" ID x 25 ft.	23446
3/4" ID x 50 ft.	23447
3/4" ID x 100 ft.	24750
1" ID x 25 ft.	23455
1" ID x 50 ft.	23448
1" ID x 100 ft.	23449
1-1/4" ID x 50 ft.	23450
1-1/4" ID x 100 ft.	23451
1-1/2" ID x 50 ft.	23452
1-1/2" ID x 100 ft.	23453

Blast Hose Safety Cables

For 1/2" ID hose	15012
For 3/4" ID to 1-1/2" ID hose	15013

Color - Black

Ships coiled and shrink wrapped.

Stock No.	Weight	Stock No.	Weight
2344412 lbs	23449109 lbs
2344524 lbs	2345060 lbs
2344618 lbs	23451121 lbs
2344735 lbs	2345265 lbs
2345527 lbs	23453130 lbs
2344854 lbs	2475064 lbs

Authorized Distributor:

CANFIELD & JOSEPH

www.canfieldjoseph.com

800-364-5452

ISO 9001:2008 certified. Clemco is committed to continuous product improvement. Specifications are subject to change without notice.

© 2014 Clemco Industries Corp. • Washington, MO 63090 • 636 239-4300 • FAX 800 726-7559