










Spring loaded galvanized steel safety cables loop over each hose to prevent the hoses from whipping in case of accidental separation of the couplings.


	PART NO	HOSE SIZE	DESCRIPTION
		<u>HOSE TO HOSE</u>	
	27WC-1	1/2" - 1-1/4"	1/8" Cable x 20" Long
	27WC-15	1" - 2-1/2"	3/16" Cable x 28" Long
	27WC-2	1-1/2" - 3"	1/4" Cable x 38" Long
	27WC-4	3" - 4"	3/8" Cable x 44" Long
		<u>HOSE TO TOOL</u>	
	27WT-1	1/2" - 1-1/4"	1/8" Cable x 20" Long
	27WT-2	1-1/2" - 3"	1/4" Cable x 38" Long

**Wire Cable Specifications**

1/8" Cable	7 x 7	Galvanized Steel Cable	1100 kgs Breaking Strain	200 psi Max Working Pressure
3/16" Cable	7 x 19	Galvanized Steel Cable	1900 kgs Breaking Strain	200 psi Max Working Pressure
1/4" Cable	7 x 19	Galvanized Steel Cable	3100 kgs Breaking Strain	250 psi Max Working Pressure
3/8" Cable	7 x 19	Galvanized Steel Cable	6500 kgs Breaking Strain	250 psi Max Working Pressure



WC-1

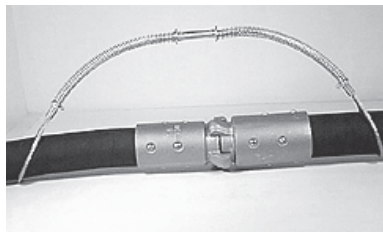

WC-15



WC-2

*National Equipment Corporation*

1806 Buchanan St.  
Brenham, Tx 77833

TEL: 979/830-8030  
800/933-2316

FAX: 979/830-0983  
800/447-2194