

High-Pressure Airless Accessories

High-Pressure Equipment for Protective Coatings



PROVEN QUALITY. LEADING TECHNOLOGY

Genuine Graco

Genuine Graco parts and accessories make the difference




Get superior spray results with Graco® parts

Rely on Graco parts and accessories for durability and long-lasting performance. Graco parts are engineered and rated specifically for high-pressure applications, which means you get the job done faster with less downtime for maintenance. Why compromise your equipment with mediocre parts?

In this document, you'll find information and part numbers for high-pressure airless accessories for Graco XM Plural-Component Sprayers, Graco Xtreme Mix™ Sprayers, and Xtreme® Airless Sprayers with NXT™ Technology.

Engineered to perform

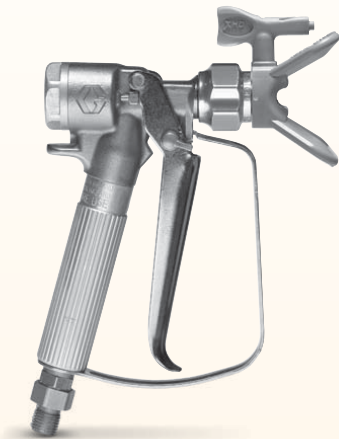

XTR™ Airless Spray Guns

Rugged design to handle the toughest protective coatings

- Compact design allows for easy maneuverability
- Variety of handle and trigger options
- High quality materials and construction



XHD™ RAC® SwitchTip

Your best choice for spraying high-pressure coatings

- Saves time – no screwdriver required
- Change tip sizes in seconds – without removing the tip guard housing
- Locking tab ensures tip stays securely in guard



Xtreme-Duty™ High-Pressure Hoses

Complete line of durable hoses for all your high-pressure spraying

- Color-coded by pressure to take the guesswork out of using the right hose
- Durable design meets exacting standards
- Tested and proven to pass quality and performance tests

Ordering Information

To get genuine Graco accessories, see your nearest Graco distributor, or call Graco at 877-844-7226

Spray Guns and Accessories



XTR-5 Airless Spray Gun, 5000 psi (345 bar, 34.5 MPa) (Ref. manual 312145)

- XTR500 1-in round handle, four-finger trigger, no tip
- XTR501 1-in round handle, four-finger trigger, 519 flat tip
- XTR502 Oval-insulated handle, four-finger trigger, 519 XHD RAC tip
- XTR503 Oval-insulated handle, two-finger trigger, 519 XHD RAC tip
- XTR504 1-in round handle, four-finger trigger, 519 XHD RAC tip
- XTR505 1-in round handle, two-finger trigger, 519 XHD RAC tip

XTR-7 Airless Spray Gun, 7250 psi (500 bar, 50 MPa) (Ref. manual 312145)

- XTR700 Round handle, four-finger trigger, no tip
- XTR701 Round handle, four-finger trigger, 519 flat tip
- XTR702 Oval-insulated handle, four-finger trigger, 519 XHD RAC tip
- XTR703 Oval-insulated handle, two-finger trigger, 519 XHD RAC tip
- XTR704 Round handle, four-finger trigger, 519 XHD RAC tip
- XTR705 Round handle, two-finger trigger, 519 XHD RAC tip

Xtreme-Duty High Pressure Gun Accessories (Fit both XTR-5 and XTR-7 spray guns)

- 246294 10 in (254 mm) gun extension, 7250 psi (500 bar, 50 MPa)
- 246295 15 in (380 mm) gun extension, 7250 psi (500 bar, 50 MPa)
- 246296 18 in (457 mm) gun extension, 7250 psi (500 bar, 50 MPa)
- 246297 180° spray nozzle, 7/8-14 UNC-2B, 7250 psi (500 bar, 50 MPa)
- 248837 Gun repair kit (Includes gasket, needle and seat)
- 287449 Four-finger round trigger kit
- 287450 Two-finger trigger kit
- 287451 Four-finger oval Insulation trigger kit
- 287032 Filter, 60 mesh
- 287033 Filter, 100 mesh
- 287034 Filter, 60 and 100 mesh combination
- 247634 Seal kit, GHD conversion (5-pack)



XHD RAC SwitchTip

		ORIFICE SIZE - INCHES																																			
		.007	.009	.011	.013	.015	.017	.019	.021	.023	.025	.027	.029	.031	.033	.035	.037	.039	.041	.043	.045	.047	.049	.051	.053	.055	.057	.059	.061	.063	.065	.067	.069	.071	.075	.081	
FAN WIDTH	2-4 (51-102)	107	109	111	113	115	117	119	121									139																			
	4-6 (102-152)		209	211	213	215	217	219	221		225	227	229	231	233	235	237	239																			
	6-8 (152-203)	307	309	311	313	315	317	319	321	323	325	327	329	331	333	335	337	339	341	343	345	347				351		355									
	8-10 (203-254)		409	411	413	415	417	419	421	423	425	427	429	431	433	435	437	439	441	443	445	447	449	451		455			459	461	463	465	467		471	475	481
	10-12 (254-305)		509	511	513	515	517	519	521	523	525	527	529	531	533	535	537	539	541	543	545	547	549	551	553	555	557	559	561	563	565	567	569	571	575		
	12-14 (305-356)		609	611	613	615	617	619	621	623	625	627	629	631	633	635	637	639	641	643	645	647	649	651	653	655	657	659	661	663	665	667	669	671	675		
	14-16 (356-406)			711	713	715	717	719	721	723	725	727	729	731	733	735	737	739	741	743	745	747	749	751	753	755	757	759	761	763	765	767	769	771			
	16-18 (406-457)				813	815	817	819	821	823	825	827	829	831	833	835	837	839	841	843	845	847	849	851	853	855	857	859	861	863	865	867					
18-20 (457-508)									923		927		931	933	935	937	939																				
Flow Rate (gpm)		.05	.09	.12	.18	.24	.31	.38	.47	.57	.67	.74	.90	1.03	1.17	1.31	1.47	1.63	1.8	1.98	2.17	2.37	2.58	2.79	4.26	3.25	3.49	3.74	4.0	4.26	4.53	4.82	5.11	5.41	6.04	7.04	
Flow Rate (lpm)		.20	.33	.49	.69	.91	1.17	1.47	1.79	2.15	2.54	2.96	3.42	3.90	4.42	4.98	5.56	6.18	6.83	7.51	8.23	8.98	9.76	10.57	16.13	12.29	13.20	14.14	15.12	16.13	17.17	18.24	19.34	20.48	22.65	26.66	

Water @ 2000 psi (138 bar, 13.8 MPa) - paints with a higher viscosity will decrease the flow rate Example: for a tip with a .039 in orifice and a 10-in (254 mm) pattern, order XHD539

Graco XHD Guard

- XHD001 XHD RAC Guard for pressures up to 7250 psi (500 bar, 50.0 MPa)
- XHD010 Seat and Seal Kit (5-pack)

High Pressure Viscon Fluid Heaters (Ref. manual 309524)



- 245867 Non-hazardous location, 120 VAC, 2300 watts, 19.2 amps
- 245868 Non-hazardous location, 200 VAC, 4000 watts, 20.0 amps
- 245869 Non-hazardous location, 240 VAC, 4000 watts, 16.7 amps
- 245870 Non-hazardous location, 480 VAC, 4000 watts, 8.3 amps
- 246276 Non-hazardous location, 380 VAC, 4000 watts, 10.5 amps



- 245848 Hazardous location, 120 VAC, 2300 watts, 19.2 amps
- 245862 Hazardous location, 200 VAC, 4000 watts, 20 amps
- 245863 Hazardous location, 240 VAC, 4000 watts, 16.7 amps
- 246254 Hazardous location, 380 VAC, 4000 watts, 10.5 amps
- 245864 Hazardous location, 480 VAC, 4000 watts, 8.3 amps

Ordering Information

To get genuine Graco accessories, see your nearest Graco distributor, or call Graco at 877-844-7226

Ball Valves (Ref. manual 306861)



102644	Inlet: 3/4 npt(f), outlet: 3/4 npt(f) 3000 psi (207 bar, 20.7 MPa) cs, ptfe seals, nylon seats
102646	Inlet: 1/2 npt(f), outlet: 1/2 npt(f) 3000 psi (207 bar, 20.7 MPa) cs, ptfe seals, nylon seats
218901	Inlet: 1/4 npsm(m), outlet: 3/4 unf(m) 5000 psi (345 bar, 34.5 MPa) cs, ptfe seals, JIC-8 outlet
239018	Inlet: 1/4 npt(m), outlet: 1/4 npt(m) 5000 psi (345 bar, 34.5 MPa) ss, ptfe seals, nylon seats
223959	Inlet: 3/8 npt(m), outlet: 1/4 npt(m) 5000 psi (345 bar, 34.5 MPa) cs, ptfe seals, nylon seats
248271	Inlet: 1/4 npt(m), outlet: 1/4 npt(m) 5000 psi (345 bar, 34.5 MPa) ss, ptfe seals, nylon seats
235992	Inlet: 3/8 npt(m), outlet: 1/4 npt(m) 5000 psi (345 bar, 34.5 MPa) ss, ptfe seals, nylon seats
238635	Inlet: 1/4 npt(m), outlet: 1/4 npt(m) 5000 psi (345 bar, 34.5 MPa) cs, fluoroelastomer seals, nylon seats
210659	Inlet: 1/4 npt(m), outlet: 3/8 npt(m) 5000 psi (345 bar, 34.5 MPa) cs, fluoroelastomer seals, nylon seats
214037	Inlet: 1/4 npt(m), outlet: 1/4 npt(m) 5000 psi (345 bar, 34.5 MPa) cs, ptfe seals, nylon seats
223960	Inlet: 3/8 npt(m), outlet: 3/8 npt(m) 5000 psi (345 bar, 34.5 MPa) cs, ptfe seals, nylon seats
210657	Inlet: 1/4 npt(m), outlet: 1/4 npt(m) 5000 psi (345 bar, 34.5 MPa) cs, fluoroelastomer seals, nylon seats
210658	Inlet: 3/8 npt(m), outlet: 3/8 npt(m) 5000 psi (345 bar, 34.5 MPa) cs, fluoroelastomer seals, nylon seats
237304	Inlet: 3/8 npt(m), outlet: 3/8 npt(m) 7400 psi (510 bar, 51 MPa) cs, ptfe seals, PEEK seats
237303	Inlet: 1/4 npt(m), outlet: 1/4 npt(m) 7400 psi (510 bar, 51 MPa) cs, ptfe seals, PEEK seats

Pump Lower Fluid Filter Elements



236495	30 mesh (595 micron), 85cc, 115cc, 2-pack
236496	60 mesh (250 micron), 85cc, 115cc, 2-pack
236497	100 mesh (149 micron), 85cc, 115cc, 2-pack
224458	30 mesh (595 micron), 145cc, 180cc, 220cc, 250cc, 290cc, 2-pack
224459	60 mesh (250 micron), 145cc, 180cc, 220cc, 250cc, 290cc, 2-pack
224468	100 mesh (149 micron), 145cc, 180cc, 220cc, 250cc, 290cc, 2-pack
238444	30 mesh (595 micron), 85cc, 115cc, 25-pack
238446	60 mesh (250 micron), 85cc, 115cc, 25-pack
238448	100 mesh (149 micron), 85cc, 115cc, 25-pack
238436	30 mesh (595 micron), 145cc, 180cc, 220cc, 250cc, 290cc, 25-pack
238438	60 mesh (250 micron), 145cc, 180cc, 220cc, 250cc, 290cc, 25-pack
238440	100 mesh (149 micron), 145cc, 180cc, 220cc, 250cc, 290cc, 25-pack

Inlet Strainers and Suction Tubes



245136	55 gal (200 l) suction tube extension kit
109534	Strainer suction-line, 3/8 npt (f), 20 mesh, sst
245176	Suction tube kit w/ 6 ft (1.8 m) hose. Xtreme sprayer kit
181072	Strainer, inlet, 1 in npsm (f), 8 mesh internal, 16 mesh external, sst. Fits Xtreme sprayer suction kit.
249024	1 in (25 mm) inlet "Y" strainer kit (w/ball valve)
248970	3/4 in (19 mm) inlet "Y" strainer kit (w/ball valve)

Feed Pump Kits



248825	Monark® 5:1, with 10 ft (3.0 m) hose, regulator kit. Ref. manual 310863
256433	10:1 feed pump w/hose and regulator kit. Ref. manual 312769
248885	Monark 23:1 pail-mount, with 50 ft (15.3 m) hose. Ref. manual 310863
248826	Monark 23:1 wall or cart mount, with 50 ft (15.3 m) hose. Ref. manual 310863
248829	Feed pump regulator kit. Ref. manual 310863

Static Mixing, 7250 psi (500 bar, 50 MPa)



248925	1/4 in x 12 ft (3.6 m) whip hose mixing kit; includes (2) 15E592 housings and 6 mix elements
15E592	Static mix housing, 1/2 in x 5 in (12 mm x 127 mm) 7250 psi. Uses 248927 mix elements.
248927	25-pack, disposable, 1/2 in (12 mm), 12 element acetal sticks fit 15E592 housing
511352	Static mixer, SST, 3/8 npt (m) x 9.5 in (9.5 mm x 241 mm) .50 (12mm) ø 12 welded sst elements

Xtreme Sprayer Accessories



262231	Heavy-duty external regulator kit for HD carts only. Ref. manual 3A0278
262230	Light-weight external regulator kit for LW or HD carts. Ref. manual 3A0278
244841	Air motor lubricator kit. Ref. manual 406512
NXT021	Integrated air control module
NXT092	Integrated air control filters, 10-pack
NXT093	Extended filter with auto drain for integrated air control
NXT094	Extended filter with manual drain for integrated air control
NXT107	NXT air motor valve (fits all three air motor sizes). Includes motor end cap gaskets.
NXT206	DataTrak upgrade kit for the NXT 2200. Converts a standard NXT motor to the DataTrak.
NXT306	DataTrak upgrade kit for the NXT 3400. Converts a standard NXT motor to the DataTrak.
NXT606	DataTrak upgrade kit for the NXT 6500. Converts a standard NXT motor to the DataTrak.
NXT102	De-ice control repair kit. Includes knob, air valve stem and seal.
NXT112	De-ice control (5-pack). Knob only.
NXT405	DataTrak tear-offs, 20-pack
NXT100	Replacement poppet valve kit. Complete poppet valve with o-rings. Fits NXT 2200, 3400, 6500.
245132	Xtreme floor-stand kit. Adapts Xtreme pumps to a 222274 floor stand (included).
255143	Wall-mount bracket. Ref. manual 311619
288347	Hopper feed kit. 7 gal (26 l) hopper kit mounts on Xtreme sprayers. Ref. manual 311902.
287884	Xtreme heavy-duty cart
287919	Xtreme light-weight cart
245191	Inlet ball spring load kit: 220cc, 250cc, 290cc
245190	Inlet ball spring load kit: 145cc, 180cc

Supply Accessories



234097	7.5 gal (28 l) green fluid tank. Includes cover, seal, 1 in npt(m) outlet fitting.
234017	7.5 gal (28 l) blue fluid tank. Includes cover, seal, 1 in npt(m) outlet fitting.
255963	Hopper, double wall, 20 gal (76 l). Ref. manual 312747.
256257	Double wall 20 gal (76 l) hopper heater kit, 240V. Includes 12 ft (3.6m) cable. Ref. manual 312747.
256512	Desiccant kit-for use with 20 gal (76 l) hoppers. Dries incoming air. Ref. manual 406739.
256274	Twistork agitator kit - for use with 20 gal (76 l) hoppers. Ref. manual 312769.
256275	T2 2:1 hopper feed pump kit - for use with 20 gal (76 l) hoppers. Ref. manual 312769.
256276	5:1 hopper feed pump kit - for use with 20 gal (76 l) hoppers. Ref. manual 312769.
15F028	Drum heater, 1000 watts. Band heater for metal drums. 230 VAC.

Bushing



159841	Bushing, reducing, 7250 psi (500 bar, 50 MPa), 3/8 npt (m), 1/4 npt (f)
100206	Bushing, reducing, 7250 psi (500 bar, 50 MPa), 1/2 npt (m), 1/4 npt (f)
121433	Bushing, reducing, 7250 psi (500 bar, 50 MPa), 1/2 npt (m), 3/8 npt (f)

Coupling



113093	Coupling, 7250 psi (500 bar, 50 MPa), 1/4 npt (f), 1/4 npt (f)
162024	Coupling, 7250 psi (500 bar, 50 MPa), 3/8 npt (f), 3/8 npt (f)
158581	Coupling, 7250 psi (500 bar, 50 MPa), 1/2 npt (f), 1/2 npt (f)



150286	Adapter, 7250 psi (500 bar, 50 MPa), 3/8 npt (m), 3/8 npt (f). Used for inlet of 15E592 mix tube.
15B729	Adapter, 7250 psi (500 bar, 50 MPa), 3/8 npt (f), 3/8 npsm (m)
150287	Adapter, 7250 psi (500 bar, 50 MPa), 3/8 npt (f), 1/4 npt (m)

Plug



100721	Plug, hex, socket, short, 7250 psi (500 bar, 50 MPa), 1/4 npt
101754	Plug, hex, socket, short, 7250 psi (500 bar, 50 MPa), 3/8 npt
100361	Plug, hex, socket, short, 7250 psi (500 bar, 50 MPa), 1/2 npt

Ordering Information

To get genuine Graco accessories, see your nearest Graco distributor, or call Graco at 877-844-7226

Elbow Fitting



100840	Fitting, elbow, street, 90, 7500 psi (517 bar, 51.7 MPa), 1/4 npt (m), 1/4 npt (f)
164259	Fitting, elbow, street, 90, 7250 psi (500 bar, 50 MPa), 3/8 npt (m), 1/4 npt (f)
155699	Fitting, elbow, street, 90, 7250 psi (500 bar, 50 MPa), 3/8 npt (m), 3/8 npt (f)
158683	Fitting, elbow, street, 90, 7400 psi (510 bar, 51 MPa), 1/2 npt (m), 1/2 npt (f)
166999	Fitting, elbow, street, 90, reducing, 7250 psi (500 bar, 50 MPa), 1/2 npt (m), 1/4 npt (f)



15M987	Elbow, 60, street, 7,250 psi (500 bar, 50 MPa), 1/2 npt (m), 1/2 npt (f)
--------	--

Nipple



166606	Nipple, reducing, Hex, 7000 psi (483 bar, 48.3 MPa), 3/4 npt (m), 3/8 npt (m), 4 1/2 in
158979	Nipple, reducing, Hex, 7250 psi (500 bar, 50 MPa), 1/2 npt (m), 3/8 npt (m), 2 3/4 in
164672	Nipple, reducing, Hex, 7250 psi (500 bar, 50 MPa), 3/8 npt (m), 1/4 npsm, 1 3/8 in
162449	Nipple, reducing, Hex, 7400 psi (510 bar, 51 MPa), 1/2 npt (m), 1/4 npt (m), 1 5/8 in
159239	Nipple, reducing, Hex, 7400 psi (510 bar, 51 MPa), 1/2 npt (m), 3/8 npt (m), 1 5/8 in
151519	Nipple, reducing, Hex, 7500 psi (517 bar, 51.7 MPa), 1/4 npt (m), 1/8 npt (m), 1 3/8 in
164856	Nipple, reducing, Hex, 8000 psi (552 bar, 55.2 MPa), 3/8 npt (m), 1/4 npt (m), 1 5/8 in
165198	Nipple, reducing, Hex, 10,000 psi (690 bar, 69 MPa), 3/8 npt (m), 1/4 npt (m), 1 3/4 in
156877	Nipple, hex, 7250 psi (500 bar, 50 MPa), 1/2 npt (m), 1/2 npt (m), 2 1/2 in
160790	Nipple, hex, 7250 psi (500 bar, 50 MPa), 3/8 npt (m), 3/8 npt (m), 3 5/8 in
156849	Nipple, hex, 7250 psi (500 bar, 50 MPa), 3/8 npt (m), 3/8 npt (m), 1.5 in
156850	Nipple, hex, 7250 psi (500 bar, 50 MPa), 3/8 npt (m), 3/8 npt (m), 2.5 in
166846	Nipple, hex, SST, 7250 psi (500 bar, 50 MPa), 1/4 npt (m), 1/4 npsm
157129	Nipple, hex, 7250 psi (500 bar, 50 MPa), 3/4 npt (m), 3/4 npt (m), 3 1/4 in
158491	Nipple, hex, 7400 psi (510 bar, 51 MPa), 1/2 npt (m), 1/2 npt (m), 1 5/8 in
162453	Nipple, hex, 7500 psi (517 bar, 51.7 MPa), 1/4 npt (m), 1/4 npsm, 1 1/5 in
156971	Nipple, hex, 7500 psi (517 bar, 51.7 MPa), 1/4 npt (m), 1/4 npt (m), 1 3/8 in
196181	Nipple, hex, 7500 psi (517 bar, 51.7 MPa), 1/4 npt (m), 1/4 npsm, 1 1/5 in, nickel plated
192593	Nipple, reducing hex, sst, 8000 psi (552 bar, 55.2 MPa), 3/4 npt (m), 1/2 npt (m), 2 3/4 in

Tee



15R875	Tee, m x f run f branch, 7250 psi (500 bar, 50 MPa), 1/4 npt (m), 1/4 npt (f), 1/4 npt (f)
15R874	Tee, m x f run f branch, 7250 psi (500 bar, 50 MPa), 3/8 npt (m), 3/8 npt (f), 3/8 npt (f)
15R873	Tee, m x f run f branch, 7250 psi (500 bar, 50 MPa), 1/2 npt (m), 1/2 npt (f), 1/2 npt (f)

Unions and Swivels



155570	Union, swivel, FxF, 10,000 psi (690 bar, 69 MPa), 1/4 npt (f), 1/4 npsm (f)
156173	Union, swivel, FxF, 7400 psi (510 bar, 51 MPa), 3/8 npt (f), 3/8 npsm (f)
207152	Union, swivel, FxF, 7250 psi (500 bar, 50 MPa), 3/8 npt (f), 3/8 npsm (f)
155865	Union, swivel, FxF, 7250 psi (500 bar, 50 MPa), 1/2 npt (f), 1/2 npsm (f)



156823	Union, swivel, MxF, 10,000 psi (690 bar, 69 MPa), 1/4 npt (m), 1/4 npsm (f)
157705	Union, swivel, MxF, 7500 psi (517 bar, 51.7 MPa), 1/4 npt (m), 3/8 npsm (f)
155665	Union, swivel, MxF, 7500 psi (517 bar, 51.7 MPa), 3/8 npt (m), 3/8 npsm (f)
235208	Union, swivel, MxF, 7500 psi (517 bar, 51.7 MPa), 3/8 npt (m), 3/8 npsm (f) sst
162505	Union, swivel, MxF, 7500 psi (517 bar, 51.7 MPa), 3/8 npt (m), 1/2 npsm (f)
158256	Union, swivel, MxF, 7500 psi (517 bar, 51.7 MPa), 1/2 npt (m), 3/8 npsm (f)
156684	Union, swivel, MxF, 7250 psi (500 bar, 50 MPa), 1/2 npt (m), 1/2 npsm (f)
114339	Union, swivel, MxF, SST, 5000 psi (345 bar, 34.5 MPa), 1/4 npt (m), 1/4 npsm (f)
236987	Swivel, hose, MxF, 7250 (500 bar, 50 MPa), 1/4 npsm (m), 1/4 npsm (f) sst
189018	Swivel, gun, MxF, 7500 psi (517 bar, 51.7 MPa), 1/4 npsm (m), 1/4npsm (f), nickel plated

Ordering Information

To get genuine Graco accessories, see your nearest Graco distributor, or call Graco at 877-844-7226

Xtreme-Duty High-Pressure Hoses

4500 psi

5600 psi

7250 psi



Xtreme-Duty 4500 psi (310 bar) High Pressure Hose

Part #	Length	Hose Diameter	Female NPSM
H42503	3 ft (0.9 m)	1/4 in (6.4 mm)	1/4 in
H42506	6 ft (1.8 m)	1/4 in (6.4 mm)	1/4 in
H42510	10 ft (3.0 m)	1/4 in (6.4 mm)	1/4 in
H42525	25 ft (7.6 m)	1/4 in (6.4 mm)	1/4 in
H42550	50 ft (15.2 m)	1/4 in (6.4 mm)	1/4 in
H4251X	100 ft (30.5 m)	1/4 in (6.4 mm)	1/4 in
H43803	3 ft (0.9 m)	3/8 in (9.5 mm)	3/8 in
H43806	6 ft (1.8 m)	3/8 in (9.5 mm)	3/8 in
H43810	10 ft (3.0 m)	3/8 in (9.5 mm)	3/8 in
H43825	25 ft (7.6 m)	3/8 in (9.5 mm)	3/8 in
H43850	50 ft (15.2 m)	3/8 in (9.5 mm)	3/8 in
H4381X	100 ft (30.5 m)	3/8 in (9.5 mm)	3/8 in
H45010	10 ft (3.0 m)	1/2 in (12.7 mm)	1/2 in
H45025	25 ft (7.6 m)	1/2 in (12.7 mm)	1/2 in
H45050	50 ft (15.2 m)	1/2 in (12.7 mm)	1/2 in
H4501X	100 ft (30.5 m)	1/2 in (12.7 mm)	1/2 in


Xtreme-Duty 5600 psi (386 bar) High Pressure Hose

Part #	Length	Hose Diameter	Female NPSM
H52503	3 ft (0.9 m)	1/4 in (6.4 mm)	1/4 in
H52506	6 ft (1.8 m)	1/4 in (6.4 mm)	1/4 in
H52510	10 ft (3.0 m)	1/4 in (6.4 mm)	1/4 in
H52525	25 ft (7.6 m)	1/4 in (6.4 mm)	1/4 in
H52550	50 ft (15.2 m)	1/4 in (6.4 mm)	1/4 in
H5251X	100 ft (30.5 m)	1/4 in (6.4 mm)	1/4 in
H53803	3 ft (0.9 m)	3/8 in (9.5 mm)	3/8 in
H53806	6 ft (1.8 m)	3/8 in (9.5 mm)	3/8 in
H53810	10 ft (3.0 m)	3/8 in (9.5 mm)	3/8 in
H53825	25 ft (7.6 m)	3/8 in (9.5 mm)	3/8 in
H53850	50 ft (15.2 m)	3/8 in (9.5 mm)	3/8 in
H5381X	100 ft (30.5 m)	3/8 in (9.5 mm)	3/8 in
H55010	10 ft (3.0 m)	1/2 in (12.7 mm)	1/2 in
H55025	25 ft (7.6 m)	1/2 in (12.7 mm)	1/2 in
H55050	50 ft (15.2 m)	1/2 in (12.7 mm)	1/2 in
H5501X	100 ft (30.5 m)	1/2 in (12.7 mm)	1/2 in

Xtreme-Duty 7250 psi (500 bar) High Pressure Hose

Part #	Length	Hose Diameter	Female NPSM
H72503	3 ft (0.9 m)	1/4 in (6.4 mm)	1/4 in
H72506	6 ft (1.8 m)	1/4 in (6.4 mm)	1/4 in
H72510	10 ft (3.0 m)	1/4 in (6.4 mm)	1/4 in
H72525	25 ft (7.6 m)	1/4 in (6.4 mm)	1/4 in
H72550	50 ft (15.2 m)	1/4 in (6.4 mm)	1/4 in
H7251X	100 ft (30.5 m)	1/4 in (6.4 mm)	1/4 in
H73803	3 ft (0.9 m)	3/8 in (9.5 mm)	3/8 in
H73806	6 ft (1.8 m)	3/8 in (9.5 mm)	3/8 in
H73810	10 ft (3.0 m)	3/8 in (9.5 mm)	3/8 in
H73825	25 ft (7.6 m)	3/8 in (9.5 mm)	3/8 in
H73850	50 ft (15.2 m)	3/8 in (9.5 mm)	3/8 in
H7381X	100 ft (30.5 m)	3/8 in (9.5 mm)	3/8 in
H75002	2 ft (0.6 m)	1/2 in (12.7 mm)	1/2 in
H75003	3 ft (0.9 m)	1/2 in (12.7 mm)	1/2 in
H75010	10 ft (3.0 m)	1/2 in (12.7 mm)	1/2 in
H75025	25 ft (7.6 m)	1/2 in (12.7 mm)	1/2 in
H75050	50 ft (15.2 m)	1/2 in (12.7 mm)	1/2 in
H7501X	100 ft (30.5 m)	1/2 in (12.7 mm)	1/2 in

H X X X X X

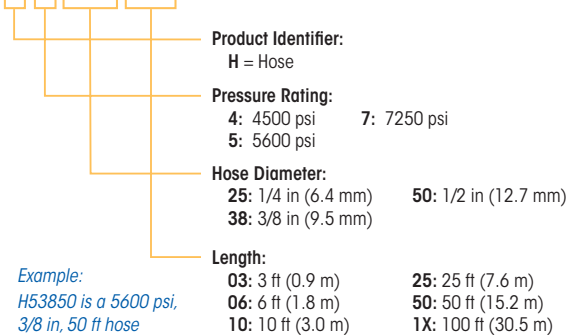

Choose the Right Hose for the Job

Technical Specifications

Working pressure	4500 psi (310 bar), 5600 psi (386 bar), or 7250 psi (500 bar)
Temperature rating (all sizes)	-40° to 180° F (-40° to 82°C)
Chemical resistance	Hose cover resistant to a wide variety of solvents, acids and bases
Weather resistance	Hose cover has outstanding resistance to oxygen, ozone, sunlight and general weather conditions
Electrical properties	Conductive hose

Heated Hose



Water Jacketed Heated Hose (Approved for explosive atmospheres) 50 ft (15.2 m) sections

245866	Heated hose kit (Includes diaphragm pump, fittings, tubes, mounting bracket and reservoir tank. Actual hose assembly and heater must be ordered separately.) Ref. manual 309525.
245840	1/4 in (6.3 mm), 5000 psi (345 bar, 34.5 MPa)
245841	1/4 in (6.3 mm), 7250 psi (500 bar, 50 MPa)
245842	3/8 in (9.5 mm), 5000 psi (345 bar, 34.5 MPa)
245843	3/8 in (9.5 mm), 7250 psi (500 bar, 50 MPa)
245844	1/2 in (12.7mm), 5000 psi (345 bar, 34.5 MPa)
245845	1/2 in (12.7mm), 7250 psi (500 bar, 50 MPa)
246078	Scuff Guard, 50 ft (15.2 m) braided polyester mesh. Blue 2.5 in nominal diameter
246456	Scuff Guard, 50 ft (15.2 m) polyethylene (6 mil) clear tubing 5 in diameter
248118	Dual hose bundles, 1/2 in & 1/2 in (12.7 mm) 7250 psi (345 bar, 34.5 MPa)
248119	Dual hose bundles, 3/8 in & 3/8 in (9.5 mm) 7250 psi (345 bar, 34.5 MPa)
248120	Dual hose bundles, 1/2 in & 3/8 in (12.7 & 9.5 mm) 7250 psi (345 bar, 34.5 MPa)
248121	Dual hose bundles, 3/8 in & 1/4 in (9.5 & 6.3 mm) 7250 psi (345 bar, 34.5 MPa)

Electric Heated Hose (Not approved for explosive atmospheres), (5000 psi, 345 bar, 34.5 MPa) 50 ft, (15 m)

248921	Hose heat control box. 1 zone, 230 VAC, 15A. Controls up to 200 ft of dual hose. Ref manual 310798.
15E750	Hose A, ID 1/4 in (6.3 mm) Dash 5 JIC fittings. (1/2-20 thread)
15E751	Hose A, ID 3/8 in (9.5 mm) Dash 5 JIC fittings. (1/2-20 thread)
15E752	Hose B, ID 3/8 in (9.5 mm) Dash 6 JIC fittings. (9/16-18 thread)
248907	Hose Set, ID 1/4(A) x 3/8(B) (6.3 x 9.5 mm) Dash 5 on "A," Dash 6 on "B"
248908	Hose Set, ID 3/8(A) x 3/8(B) (9.5x 9.5 mm) Dash 5 on "A," Dash 6 on "B"



ABOUT GRACO

PROVEN QUALITY. LEADING TECHNOLOGY.

Founded in 1926, Graco is a world leader in fluid handling systems and components. Graco products move, measure, control, dispense and apply a wide range of fluids and viscous materials used in vehicle lubrication, commercial and industrial settings.

The company's success is based on its unwavering commitment to technical excellence, world-class manufacturing and unparalleled customer service. Working closely with qualified distributors, Graco offers systems, products and technology that set the quality standard in a wide range of fluid handling solutions. Graco provides equipment for spray finishing, protective coating, paint circulation, lubrication, and dispensing sealants and adhesives, along with power application equipment for the contractor industry. Graco's ongoing investment in fluid management and control will continue to provide innovative solutions to a diverse global market.

GRACO LOCATIONS

MAILING ADDRESS

P.O. Box 1441
Minneapolis, MN 55440-1441
Tel: 612-623-6000
Fax: 612-623-6777

AMERICAS

MINNESOTA

Worldwide Headquarters
Graco Inc.
88-11th Avenue N.E.
Minneapolis, MN 55413

EUROPE

BELGIUM

European Headquarters
Graco N.V.
Industrieterrein-Oude Bunders
Slakweidestraat 31
3630 Maasmechelen,
Belgium
Tel: 32 89 770 700
Fax: 32 89 770 777

ASIA PACIFIC

AUSTRALIA

Graco Australia Pty Ltd.
Suite 17, 2 Enterprise Drive
Bundoora, Victoria 3083
Australia
Tel: 61 3 9467 8558
Fax: 61 3 9467 8559

CHINA

Graco Hong Kong Ltd.
Shanghai Representative Office
Room 118 1st Floor
No.2 Xin Yuan Building
No.509 Cao Bao Road
Shanghai, 200233
The People's Republic of China
Tel: 86 21 649 50088
Fax: 86 21 649 50077

INDIA

Graco Hong Kong Ltd.
India Liaison Office
Room 432, Augusta Point
Regus Business Centre 53
Gurgaon, Haryana
India 122001
Tel: 91 124 435 4208
Fax: 91 124 435 4001

JAPAN

Graco K.K.
1-27-12 Hayabuchi
Tsuzuki-ku
Yokohama City, Japan 2240025
Tel: 81 45 593 7300
Fax: 81 45 593 7301

KOREA

Graco Korea Inc.
Shinhan Bank Building
4th Floor #1599
Gwanyang-Dong, Dongan-Ku,
Anyang-si, Korea 431-060
Tel: 82 31 476 9400
Fax: 82 31 476 9801

SALES/ DISTRIBUTION/ SERVICE

Call today for product information or to request a demonstration.

877-84GRACO (1-877-844-7226) or visit us at www.graco.com.

Graco Inc. is registered to I.S. EN ISO 9001

800-364-5452

North America
Customer Service
800-328-0211
Fax 877-340-6427